


永磁直行星齿轮电机 (内齿圈材质: 金属)
PM DC Planetary Gear Motor (Ring Gear Material: Metal)

32JXE30K/31ZY51G

Φ32行星减速器, 允许转矩范围: 0.3N.m~3.0N.m
32mm OD Planetary Gearbox,
Permissible Load Range: 0.3N.m~3.0N.m

31ZY51G直流电机是高级配置, 采用滚动轴承、长寿命电刷, 还配置了电感-电容防干扰元件, 适合在仪器、自动化装置中使用。
31ZY51G DC motor is an advanced configuration, besides ball bearing and long lived brushes, equipping with inductance – capacitance anti jamming elements, It is suitable for instrumentation and automation devices.
常规产品出轴直径Φ6, 也可以配置直径Φ8的出轴。 Standard output shaft OD 6mm, OD 8mm optional.

● 外形和安装尺寸 Dimensions

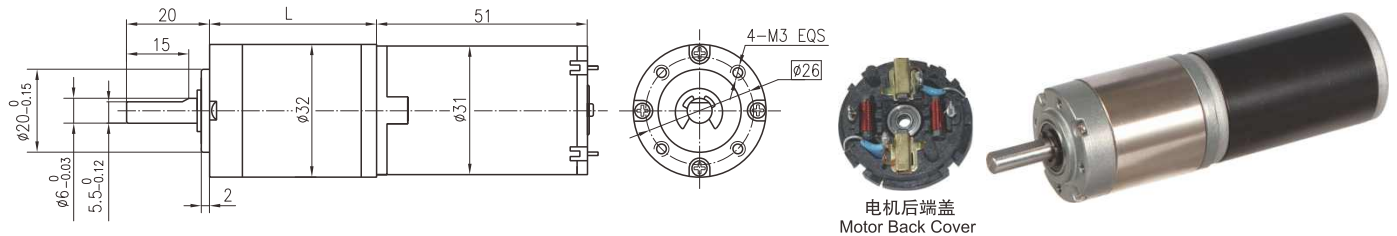

● 电动机主要技术参数 Motor Technical Data

电机型号 Type	额定电压 Rated voltage VDC	空载转速 No-load speed r/min	空载电流 No-load current mA	额定转速 Rated speed r/min	额定转矩 Rated torque mN.m	输出功率 Output power W	额定电流 Rated current mA	堵转转矩 Stall torque mN.m	堵转电流 Stall current A
31ZY51G-2440	24	4000	70	3130	22	7.1	430	101	1.6
31ZY51G-2450	24	5000	75	3830	25	9.8	570	107	2.3
31ZY51G-2472	24	7200	130	5500	28	16.1	900	145	3.6

● 齿轮减速电机主要技术参数 Gear Motor Technical Data

配置31ZY51G-2440直流电机 (31ZY51G-2440 DC Motor)

减速比	Reduction ratio	3.7	5.2	14	19	27	51	71	100	139	181	219	306	354
减速级数	Number of gear trains	1	1	2	2	2	3	3	3	3	4	4	4	4
减速器长度(L)	Length(L)	mm	25.7	25.7	32.8	32.8	39.7	39.7	39.7	39.7	46.6	46.6	46.6	46.6
空载转速	No-load speed	r/min	1081	769	286	211	148	78	56	40	29	22	18	13
额定转速	Rated speed	r/min	846	602	224	165	116	61	44	31	23	17	14	10
额定转矩	Rated torque	N.m	0.073	0.10	0.25	0.34	0.48	0.82	1.14	1.6	2.2	2.6	3.0	3.0
最大瞬间允许负载	N.m Max. permissible load in a short time		1.0	1.0	3.5	3.5	3.5	7.5	7.5	7.5	7.5	9.0	9.0	9.0

配置31ZY51G-2450直流电机 (31ZY51G-2450 DC Motor)

减速比	Reduction ratio	3.7	5.2	14	19	27	51	71	100	115	139	181	219	254
减速级数	Number of gear trains	1	1	2	2	2	3	3	3	3	3	4	4	4
减速器长度(L)	Length(L)	mm	25.7	25.7	32.8	32.8	39.7	39.7	39.7	39.7	39.7	46.6	46.6	46.6
空载转速	No-load speed	r/min	1351	962	357	263	185	98	70	50	43	36	28	23
额定转速	Rated speed	r/min	1035	737	274	202	142	75	54	38	33	28	21	17
额定转矩	Rated torque	N.m	0.083	0.12	0.28	0.39	0.55	0.93	1.3	1.8	2.1	2.5	3.0	3.0
最大瞬间允许负载	N.m Max. permissible load in a short time		1.0	1.0	3.5	3.5	3.5	7.5	7.5	7.5	7.5	7.5	9.0	9.0

配置31ZY51G-2472直流电机 (31ZY51G-2472 DC Motor)

减速比	Reduction ratio	3.7	5.2	14	19	27	51	71	100	115	139	181	219	254
减速级数	Number of gear trains	1	1	2	2	2	3	3	3	3	3	4	4	4
减速器长度(L)	Length(L)	mm	25.7	25.7	32.8	32.8	39.7	39.7	39.7	39.7	39.7	46.6	46.6	46.6
空载转速	No-load speed	r/min	1941	1390	514	379	267	141	101	72	62	52	40	33
额定转速	Rated speed	r/min	1482	1062	393	289	204	108	77	55	48	40	30	25
额定转矩	Rated torque	N.m	0.093	0.13	0.32	0.43	0.61	1.0	1.5	2.0	2.4	2.8	3.0	3.0
最大瞬间允许负载	N.m Max. permissible load in a short time		1.0	1.0	3.5	3.5	3.5	7.5	7.5	7.5	7.5	7.5	9.0	9.0