


永磁直行星齿轮电机 (内齿圈材质: 粉末金属)

PM DC Planetary Gear Motor (Ring Gear Material: Powder Metal)

22JXF3K/20ZY32

Φ22行星减速器, 允许转矩范围: 0.03N.m~0.3N.m
22mm OD Planetary Gearbox,
Permissible Load Range: 0.03N.m~0.3N.m

● 外形和安装尺寸 Dimensions

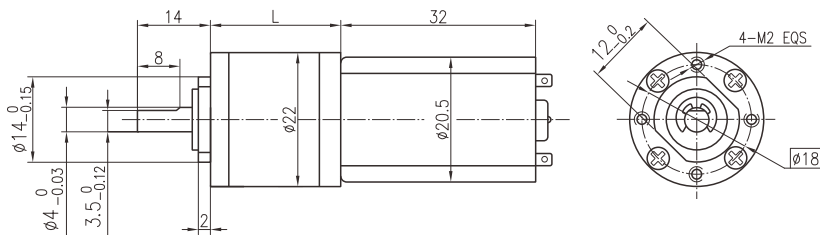

● 电动机主要技术参数 Motor Technical Data

电机型号 Type	额定电压 Rated voltage VDC	空载转速 No-load speed r/min	空载电流 No-load current mA	额定转速 Rated speed r/min	额定转矩 Rated torque mN.m	输出功率 Output power W	额定电流 Rated current mA	堵转力矩 Stall torque mN.m	堵转电流 Stall current A
20ZY32-1280	12	8000	70	6700	2.2	1.5	200	13.9	1.07
20ZY32-2480	24	8000	40	6700	2.3	1.6	110	15.0	0.58

● 齿轮减速电机主要技术参数 Gear Motor Technical Data

配置20ZY32-1280直流电机 (20ZY32-1280 DC Motor)

减速比 Reduction ratio	4	4.75	16	19	22	64	76	90	107	256	304	364	429	509
减速级数 Number of gear trains	1	1	2	2	2	3	3	3	3	4	4	4	4	4
减速器长度(L) Length(L) mm	13.0	13.0	16.7	16.7	16.7	20.4	20.4	20.4	20.4	24.1	24.1	24.1	24.1	24.1
空载转速 No-load speed r/min	2000	1684	500	421	364	125	105	89	75	31	26	22	19	16
额定转速 Rated speed r/min	1675	1411	419	353	305	105	88	74	63	26	22	18	16	13
额定转矩 Rated torque N.m	0.008	0.009	0.029	0.034	0.039	0.10	0.12	0.14	0.17	0.3	0.3	0.3	0.3	0.3
最大瞬间允许负载 Max. permissible load in a short time N.m	0.09	0.09	0.45	0.45	0.45	0.75	0.75	0.75	0.75	0.75	0.9	0.9	0.9	0.9

配置20ZY32-2480直流电机 (20ZY32-2480 DC Motor)

减速比 Reduction ratio	4	4.75	16	19	22	64	76	90	107	256	304	364	429	509
减速级数 Number of gear trains	1	1	2	2	2	3	3	3	3	4	4	4	4	4
减速器长度(L) Length(L) mm	13.0	13.0	16.7	16.7	16.7	20.4	20.4	20.4	20.4	24.1	24.1	24.1	24.1	24.1
空载转速 No-load speed r/min	2000	1684	500	421	364	125	105	89	75	31	26	22	19	16
额定转速 Rated speed r/min	1675	1411	419	353	305	105	88	74	63	26	22	18	16	13
额定转矩 Rated torque N.m	0.008	0.010	0.030	0.035	0.041	0.11	0.13	0.15	0.18	0.3	0.3	0.3	0.3	0.3
最大瞬间允许负载 Max. permissible load in a short time N.m	0.09	0.09	0.45	0.45	0.45	0.75	0.75	0.75	0.75	0.75	0.9	0.9	0.9	0.9

● 电动机特性图 Motor Characteristic Figure

