


永磁直流行星齿轮电机 (内齿圈材质: 金属)
 PM DC Planetary Gear Motor (Ring Gear Material: Metal)

$\Phi 28$ 行星减速器, 允许转矩范围: 0.2N.m~2.0N.m
 28mm OD Planetary Gearbox,
 Permissible Load Range: 0.2N.m~2.0N.m

28JNC20K/28ZY38

● 外形和安装尺寸 Dimensions

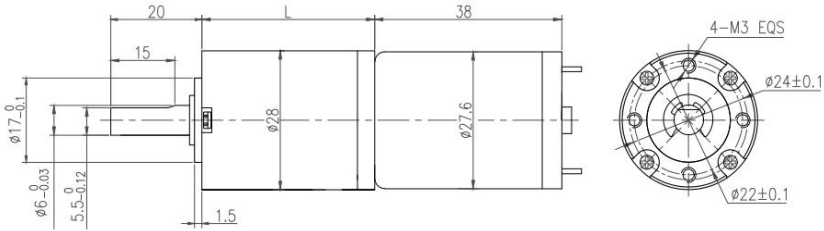

● 电动机主要技术参数 Motor Technical Data

电机型号 TYPE	额定电压 Rated voltage VDC	空载转速 No-load speed r/min	空载电流 No-load current mA	额定转速 Rated speed r/min	额定转矩 Rated torque mN.m	输出功率 Output power W	额定电流 Rated current mA	堵转力矩 Stall torque mN.m	堵转电流 Stall current A
28ZY38-1240	12	4000	80	2600	7.0	1.86	350	20	0.75
28ZY38-1250	12	5000	100	3450	7.0	2.48	370	21.5	0.90
28ZY38-2450	24	5000	60	4000	6.9	2.87	200	22	0.60

● 齿轮减速电机主要技术参数 Gear Motor Technical Data

配置 28ZY38-1240 直流电机 (28ZY38-1240 DC Motor)

减速比 Reduction ratio	3.7	5.2	14	19	27	51	71	100	139	189	264	369	516
减速级数 Number of gear trains	1	1	2	2	2	3	3	3	3	4	4	4	4
减速器长度(L) Length(L) mm	21.5	21.5	28.9	28.9	28.9	35.3	35.3	35.3	35.3	41.6	41.6	41.6	41.6
空载转速 No-load speed r/min	1078	772	286	211	148	78	56	40	29	21	15	11	7.8
额定转速 Rated speed r/min	701	502	186	137	96	51	37	26	19	14	10	7.0	5.0
额定转矩 Rated torque N.m	0.023	0.033	0.079	0.11	0.15	0.26	0.36	0.51	0.71	0.86	1.2	1.7	2
最大瞬间允许负载 Max. permissible load in a short time N.m	0.6	0.6	2.4	2.4	2.4	4.8	4.8	4.8	4.8	6.0	6.0	6.0	6.0

配置 28ZY38-1250 直流电机 (28ZY38-1250 DC Motor)

减速比 Reduction ratio	3.7	5.2	14	19	27	51	71	100	139	189	264	369	516
减速级数 Number of gear trains	1	1	2	2	2	3	3	3	3	4	4	4	4
减速器长度(L) Length(L) mm	21.5	21.5	28.9	28.9	28.9	35.3	35.3	35.3	35.3	41.6	41.6	41.6	41.6
空载转速 No-load speed r/min	1348	965	357	263	185	98	70	50	36	26	19	14	9.7
额定转速 Rated speed r/min	930	666	246	182	128	68	49	35	25	18	13	9.3	6.7
额定转矩 Rated torque N.m	0.023	0.033	0.079	0.11	0.15	0.26	0.36	0.51	0.71	0.86	1.2	1.7	2
最大瞬间允许负载 Max. permissible load in a short time N.m	0.6	0.6	2.4	2.4	2.4	4.8	4.8	4.8	4.8	6.0	6.0	6.0	6.0

配置 28ZY38-2450 直流电机 (28ZY38-2450 DC Motor)

减速比 Reduction ratio	3.7	5.2	14	19	27	51	71	100	139	189	264	369	516
减速级数 Number of gear trains	1	1	2	2	2	3	3	3	3	4	4	4	4
减速器长度(L) Length(L) mm	21.5	21.5	28.9	28.9	28.9	35.3	35.3	35.3	35.3	41.6	41.6	41.6	41.6
空载转速 No-load speed r/min	1348	965	357	263	185	98	70	50	36	26	19	14	9.7
额定转速 Rated speed r/min	1078	772	286	211	148	78	56	40	29	21	15	11	7.8
额定转矩 Rated torque N.m	0.023	0.032	0.078	0.11	0.15	0.26	0.36	0.50	0.70	0.85	1.2	1.7	2
最大瞬间允许负载 Max. permissible load in a short time N.m	0.6	0.6	2.4	2.4	2.4	4.8	4.8	4.8	4.8	6.0	6.0	6.0	6.0

该产品可以根据客户需求定制

The motor can be designed & manufactured with customized request

A-8B (2023)